


TOWN OF PENDLETON
6570 Campbell Boulevard
Lockport, NY 14094

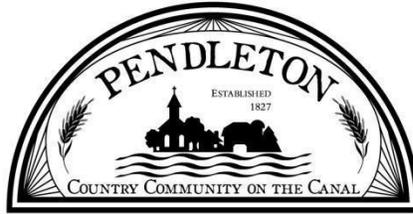

September 8, 2025

Request for Proposals

Town Network Infrastructure Work

Overview: The Town of Pendleton is requesting proposals for work that generally involves:

- Upgrade and relocation of the fire alarm system.
- Rewiring of network connected devices.
- Installation of new devices.
- Upgrade of various network connected devices.
- Other efforts related to ensuring proper operation of all systems impacted by this work.

Project Location: The Town Hall is located at 6570 Campbell Boulevard in the Town of Pendleton. The Highway Garage is located at 6640 Campbell Boulevard in the Town of Pendleton. Referenced Town Park facilities are located on the same parcel as the Town Hall, generally southwest of the Town Hall.

Project Description: The proposed work includes the following:

- A) Upgrade and relocate the fire alarm system to the new server room. Replace all wiring and devices and add devices to bring the system up to code. Remove all existing wiring and unused components.
- B) Provide and install three (3) wireless panic buttons on a Honeywell system. Locations to be specified by the owner.
- C) Rewire and upgrade the existing access control system to a ProdataKey (PDK) system. Installation of two (2) additional doors with reader and electronic locks. Install all panels in the new server room and remove all old panels and wiring. Locations of additional doors to be specified by the owner.

- D) Install and terminate new data and telephone wiring with CAT6 data wire. Removal and disposal of all old wiring upon server move to new server room. All new wire to be terminated in the new server room. After the server is moved, the new wire will then be terminated in each specified location. Please note that the network cannot be switched over until the server is moved.
- E) Install one (1) - 75" display panel in the board room in a location to be specified by the owner. An HDMI plug is to be installed adjacent to the new display device and two input jacks are to be installed in locations to be specified by the owner underneath the board bench.
- F) Upgrade existing camera system to a Luminys system with a 32 channel network video recording system with 10 TB hard drive. Replace and rewire all exterior cameras with 8 MP turret cameras and interior cameras with 4 MP dome cameras. Add one (1) - 8 MP dome camera inside and five (5) - 8 MP turrets. Remove and discard all old wiring.
- G) Upgrade the existing access control system in the Highway Garage to a new ProdataKey (PDK) system.
- H) Upgrade the existing Highway Garage camera system to a Luminys network video recording system with 8 TB hard drive. Replace existing cameras with 8 MP turret cameras
- I) Pull network wires to new Town Park bathrooms and install four (4) doors on ProdataKey (PDK) access control system. Provide all hardware necessary to operate at scheduled times and dates.
- J) Pull camera network wire to old Town Park bathrooms. Remove point to point system and install three (3) new 8 MP turret cameras.

Additional Requirements: The contractor is responsible for confirming quantities and locations of all items, including, but not limited to, all device counts and wire lengths. The proposal must include an allowance for the cost of consulting and/or collaborative work with the Town's network consultant for any required integration with current systems controlling the components detailed above.

Requested Proposal: Submitted proposals must include all costs, including materials and labor, to complete the project as detailed. Furthermore, proposals must reflect current Prevailing Wage requirements.

Contact: Any questions and other communications are to be directed to the Information Technology Coordinator, who may be reached at (716) 625-8833. Access to the site of the proposed work is available during typical open hours of Town of Pendleton offices.

Deadline: All proposals are due to the Town Clerk of the Town of Pendleton by 3:00 pm on October 7, 2025.